



MATERIALS

Handling

PTY LTD *Working with ease...*

Safe & Efficient Trailer Loading & Unloading



Safe & Efficient Trailer Loading & Unloading

The Dockless Trailer Loader is an inclined twin belt conveyor with manually adjustable extending "tongue" which delivers packages into, or from, the trailer. Powered roller or gravity skatewheel extending tongue options are available.

Simple hydraulic height adjustment on both the infeed boom and main boom provides the load/unload levels required. Large robust swivel castors make the unit easy to manoeuvre and re-locate for multi-door applications. The Dockless Loader has a maximum penetration of 8500mm within the trailer, making it suitable for loading/unloading 20 foot and 40 foot trailers.



FEATURES


- Simple to operate.
- Available with gravity skatewheel or powered roller tongue.
- Easy to manoeuvre for multi-door applications.
- Suitable for 20 foot and 40 foot trailers.
- Easily connects to Best flexible conveyors for continuous conveying.



DIMENSIONS	A	B	C	D	E
Gravity Skatewheel Extending Tongue	3000mm	1000mm	900-2400mm	600-1150mm	8500mm
Powered Roller Extending Tongue	3000mm	1000mm	900-2400mm	600-1150mm	8500mm

TECHNICAL DATA

Electrics:	Single phase x 240v x 50 Hertz - 0.37kw drive
Belt Material:	Two ply, high grip, rough top finish
Effective Width:	600mm
Surface Speed:	22 metres per minute
Weight:	950kg
Chassis Construction:	Heavy gauge fabricated hollow steel section
Castors:	150/200mm dia/swivel/braked
Forward/Reverse/Stop:	Controls located on both ends of infeed boom
Capacity:	40kgs per metre

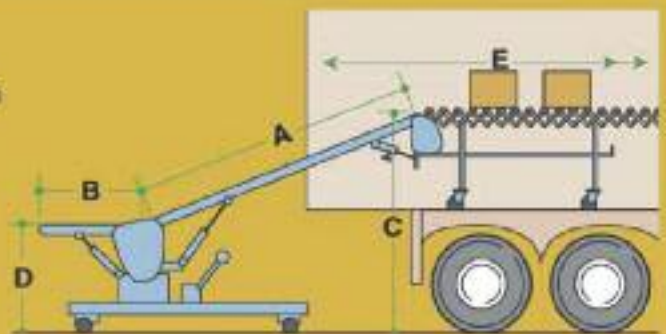

Our website: www.materialshandling.com.au
 Email us: result@materialshandling.com.au

Phone us: 1300 65 00 35
 Fax us: 1800 68 68 96

Contact us for Australia Wide Sales & Service