


KEEP AREA CLEAR.


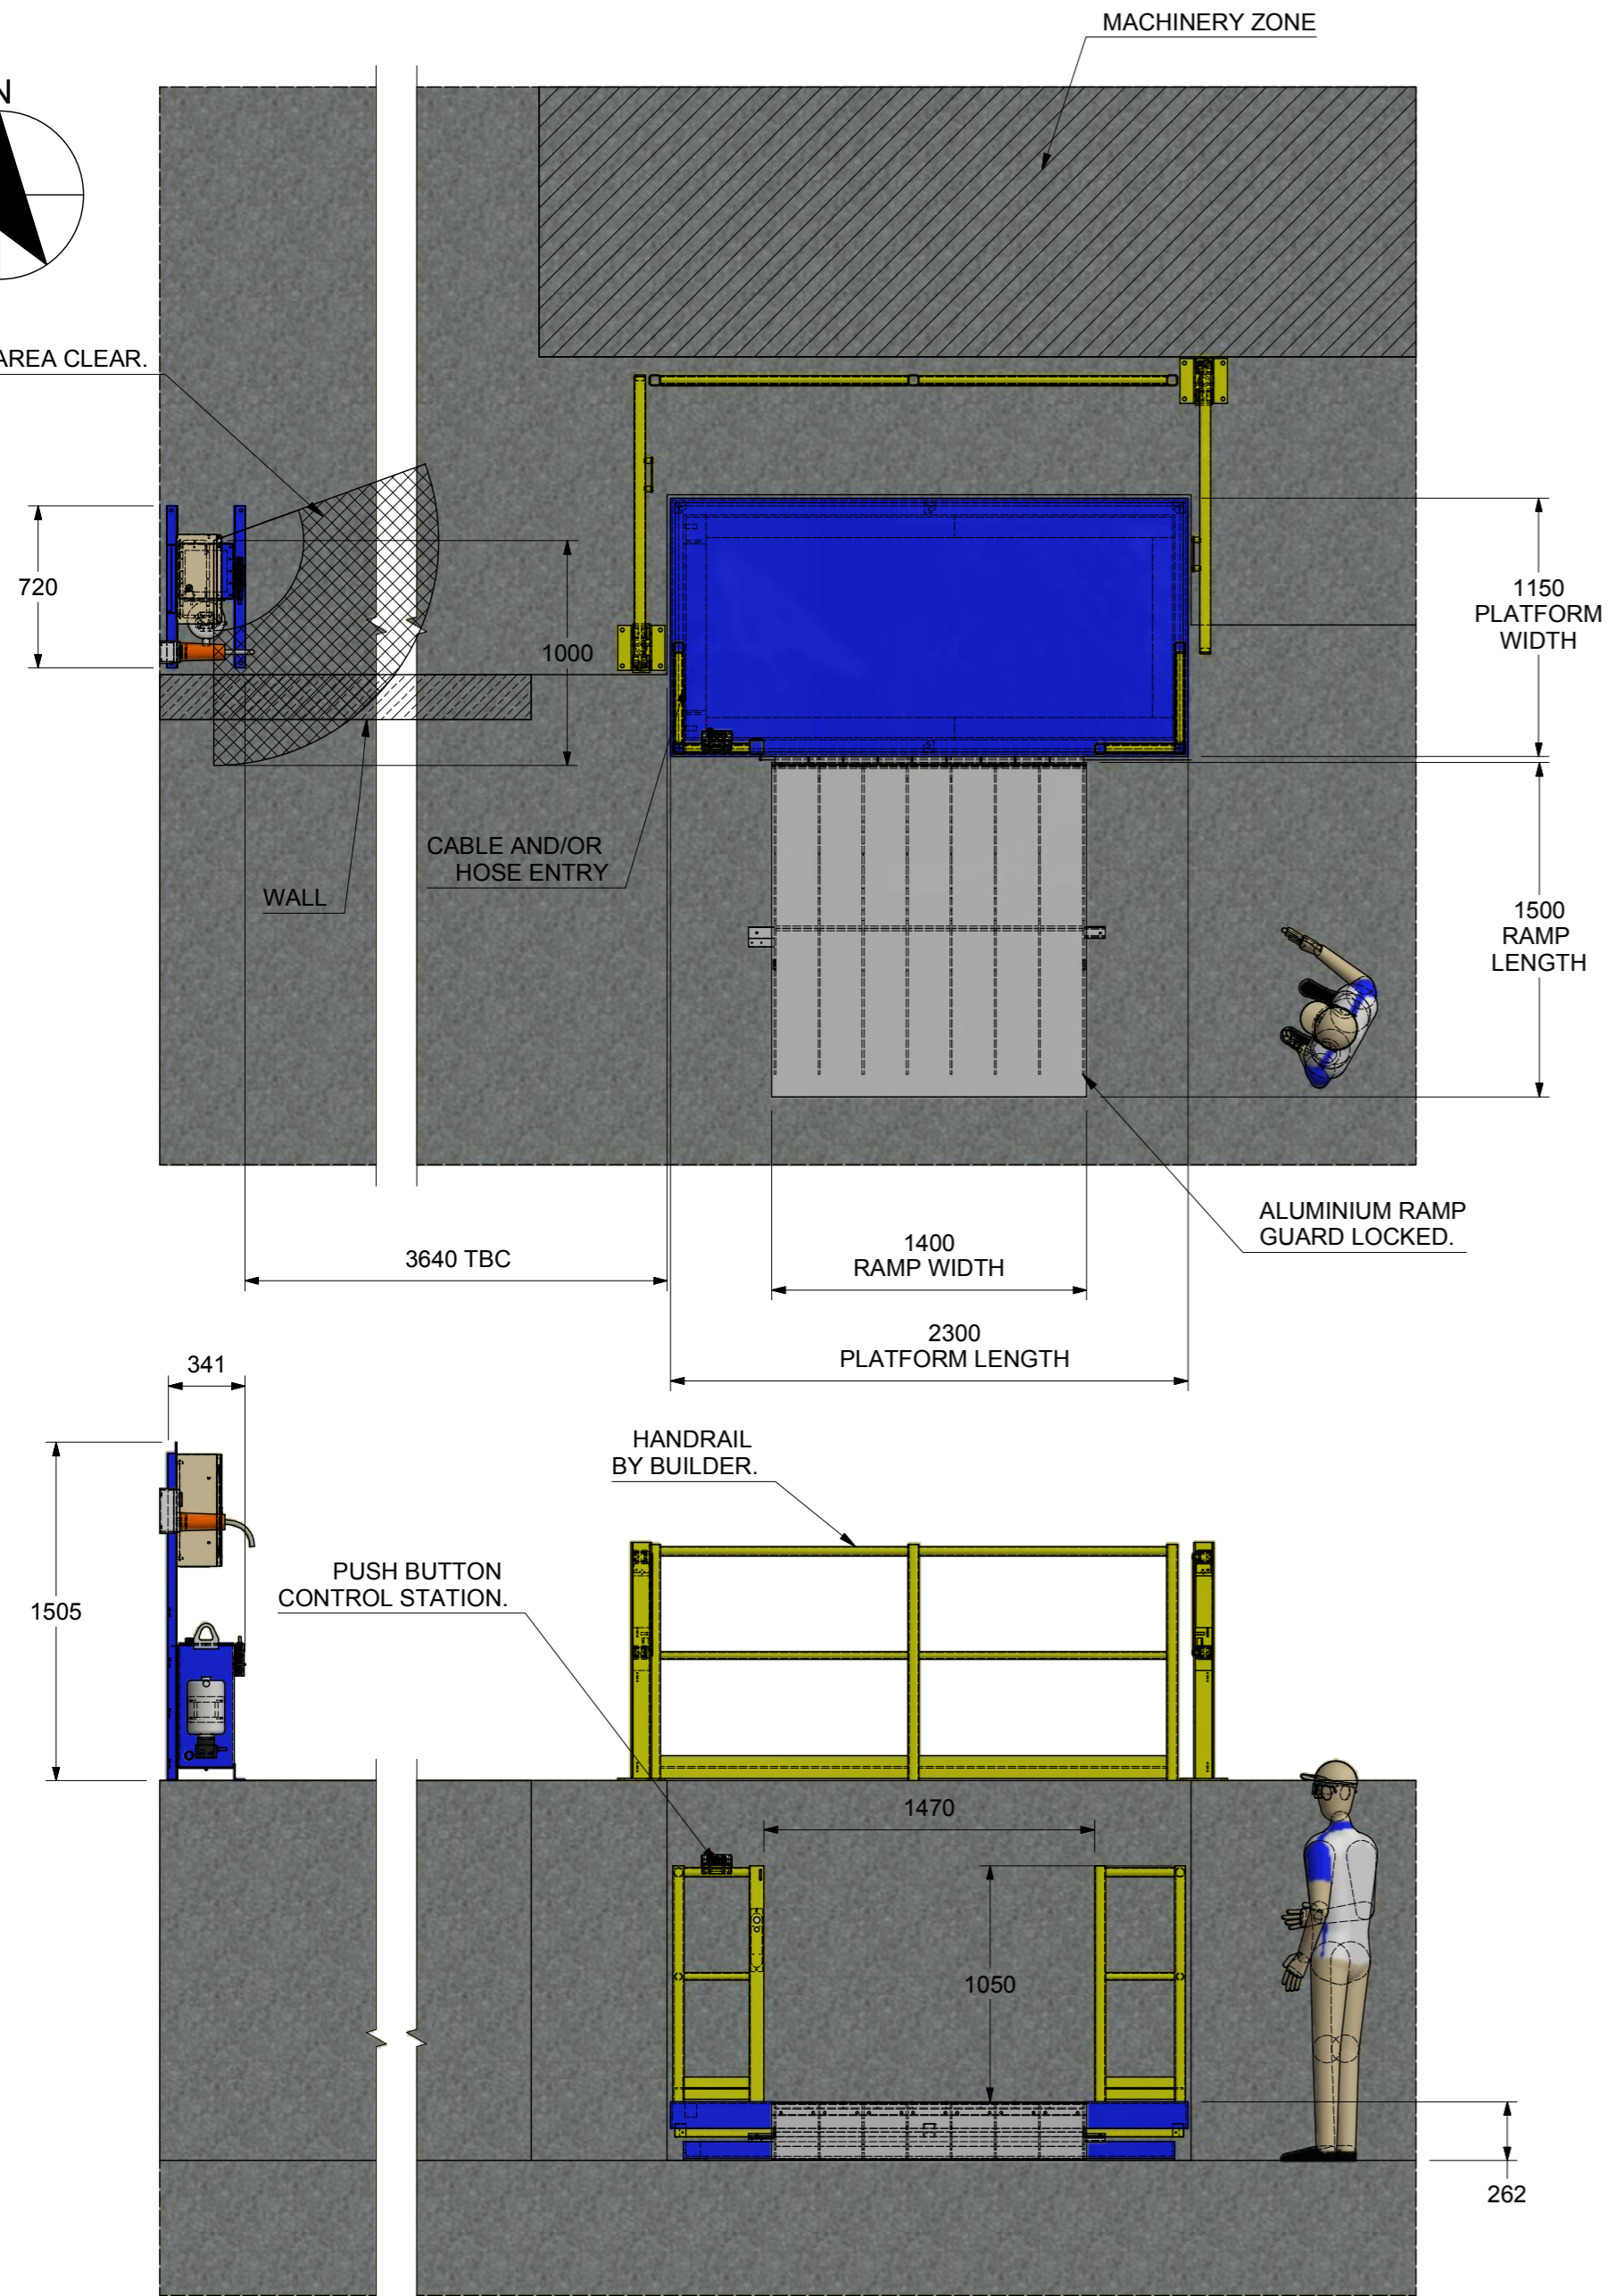


UNIT SPECIFICATIONS

LIFT CAPACITY: 1000 kg
 PLATFORM SIZE: 2300mm x 1150mm
 AVAILABLE TRAVEL: 1600 mm
 LIFT TIME: 24 sec
 DESCENT PROTECTION: Safety Bar
 POWER UNIT LOCATION: Remote on 8 m
 ENVIRONMENT: Dry, indoor areas only.
 PLATFORM FINISH: Plain

POWER REQUIREMENTS

415V, 3 PHASE, 2.4 kW.
 10 AMP, 4 PIN SWITCHED OUTLET
 (CLIPSAL 56C410 OR SIMILAR)
 LOCATED WITHIN 3 METRES OF POWER UNIT/ LIFT TABLE.
 SUPPLIED & FITTED BY BUILDER.
 UP STREAM CIRCUIT BREAKER MUST BE D CURVE.

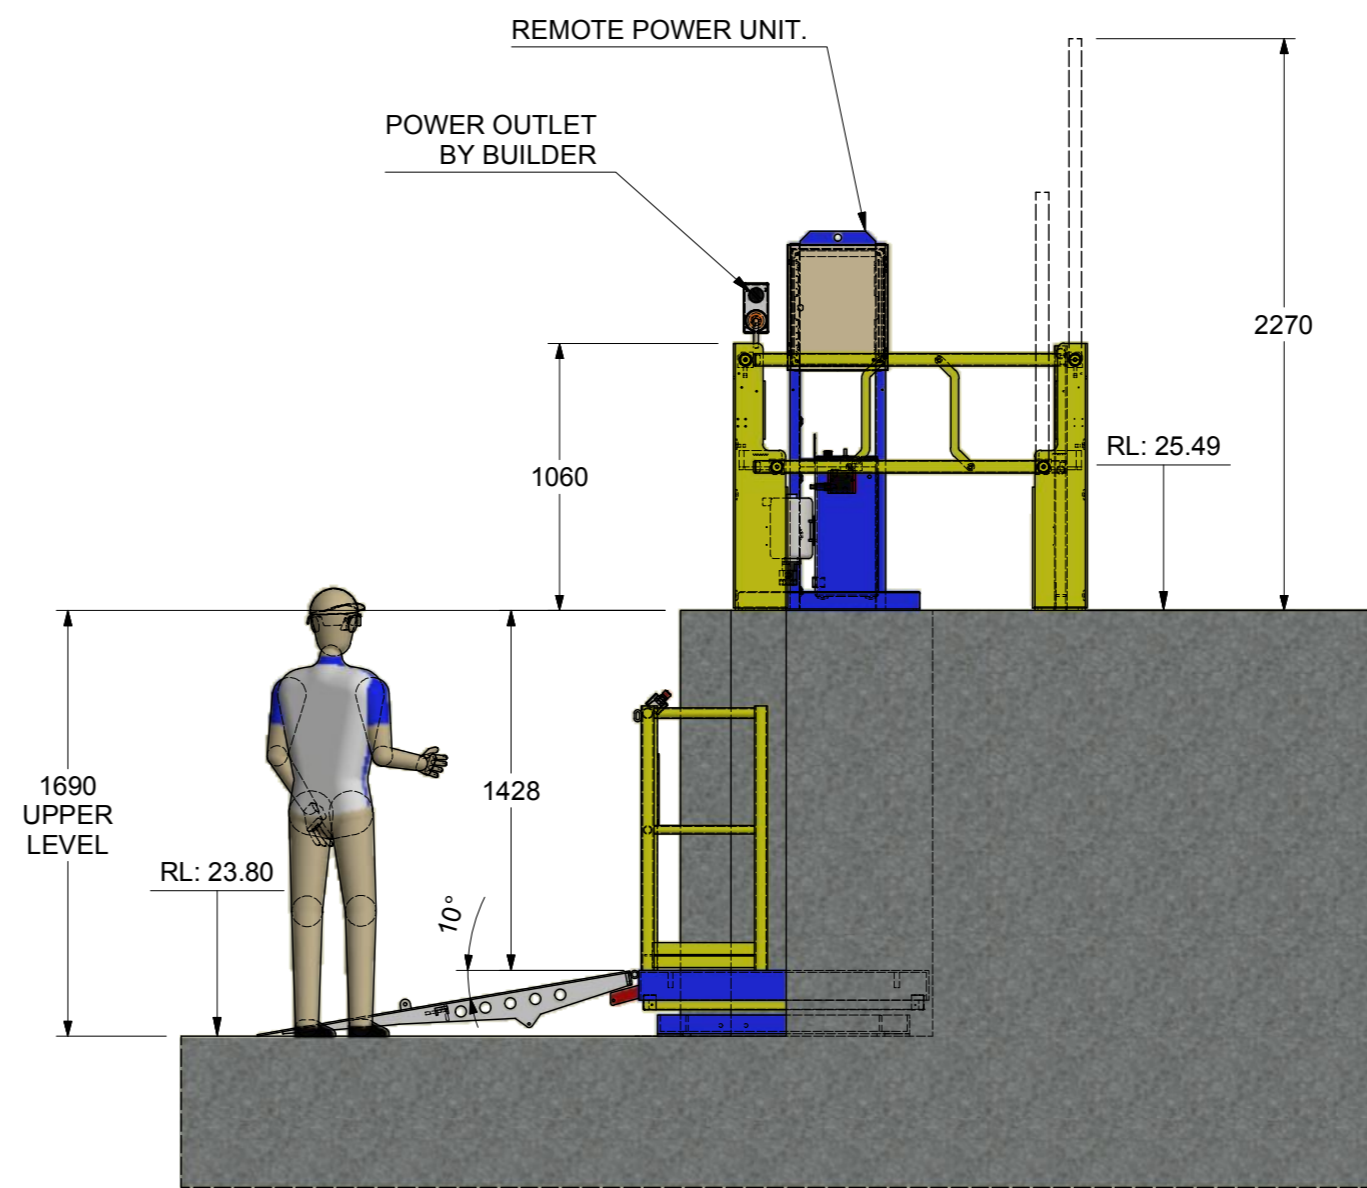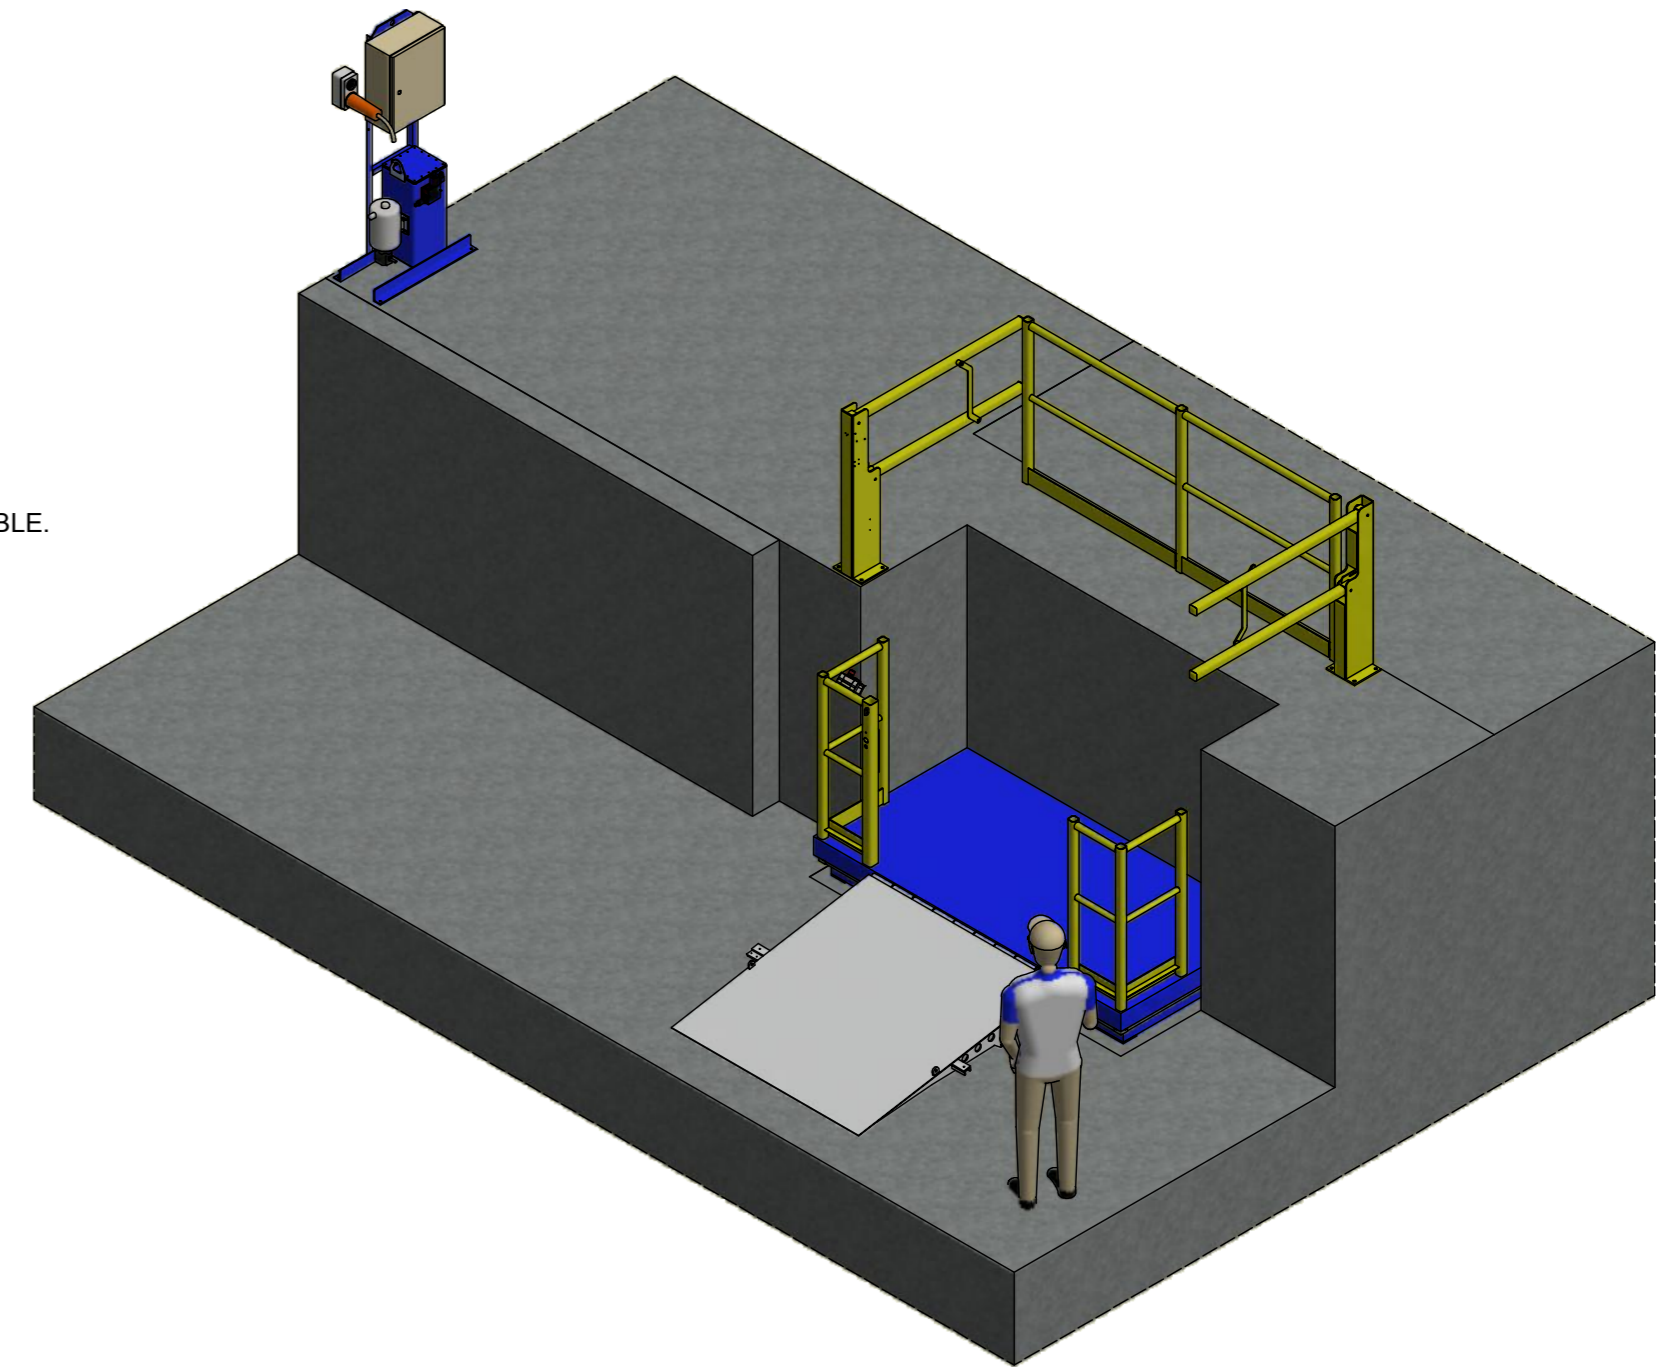

NOTE: HOSES AND CABLES BETWEEN POWER UNIT AND BASE OF LIFT TABLE AND ALSO FREE STANDING GATES TO BE SURFACE RUN BY INSTALLER.

LIFT TABLE MASS: 850 kg approx.

PLATFORM : Blue.
 BASE : Blue.
 LEG SET & POWER UNIT : Blue.
 HANDRAIL : Yellow.
 GATE : Yellow.