STEEL PALLET CAGES SPCT-02SP SPECIFICATIONS








Front drop-down gate





Removable back gate



This cage can be transported by forklift or pallet trolley, can be stacked up to 4 high when empty and 2 high when loaded. The base is designed with racking locators making it suitable for storage on pallet racks.


The front top and rear frames are designed to swing outwards for easy access to goods within the cage, even when stacked. The complete front and rear frames can be removed.

Optional galvanised sheet metal flooring (SPCT-F) is available upon request. The optional SPCT-F fits over existing slat base to prevent objects from falling through.

Supplied standard as flatpack, for onsite assembly complete with steel pallet. Zinc Finish

SPECIFICATIONS:

Working Load Limit (WLL)	1000 kg (evenly distributed)
Internal Clearance	1080 x 1080 x 754 mm
Overall Dimensions	1205 x 1165 x 1028 mm
Unit Weight	75 kg

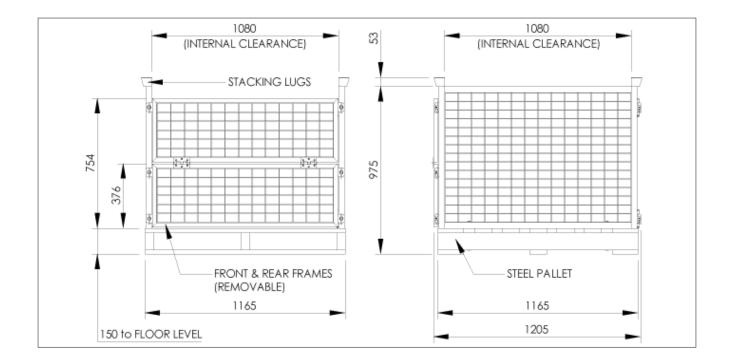

Australia Wide Sales & Service sales@materialshandling.com.au | www.materialshandling.com.au | 1300 65 00 35

MATERIALS Handling Working with ease-