




Indoor Dangerous  
Goods Storage Cabinets  
Oxidising Agents

**MATERIALS**  
**Handling** *Working with ease...*  
PTY LTD


## FEATURES

# Class 5.1 Oxidising Agent Storage Cabinets



### Self-Closing Doors

Self-closing, close fitting doors that automatically release in the event of a build-up of pressure within the cabinet.




### Dual Walled

Double walled sheet steel construction with a 40mm thermic air barrier.



### Perforated Adjustable Shelving

Strong fully adjustable shelving perforated for air movement, 100mm adjustment increments.




### Vent Openings

Built in flash arrestors and vent openings [for mechanical ventilation systems.]



### Complies with AS 4326:2008

Designed and manufactured in full conformance to AS 4326:2008 - The storage and handling of oxidising agents.



### High Capacity Sump


High capacity liquid tight sump to contain spills - 150mm deep.



### Additional Features

- Stainless steel pin with continuous hinging for strength and reliability.
- Distinct Safety signs and directions that comply with AS 1216 and AS 1319.
- Manufactured in Australia.
- State of the art powder coat finish for high durability and performance.
- Sequential door closing system.

SC030A

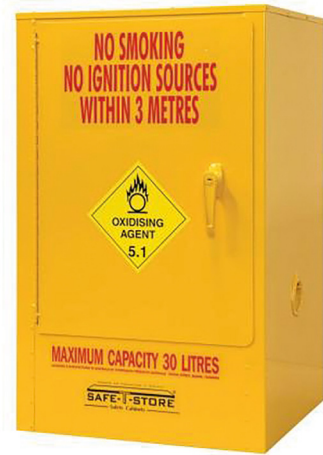

30L - Oxidising Agent Storage Cabinet

Dimensions			
	H	W	D
External	800	500	450
Internal	553	418	370
Storage Levels	2		
Sump Capacity	23L		
Weight	33.0 kg		
Complies With	AS 4326:2008		
Max	4L	20L	205L
30L	8	1	0

SC060A



60L - Oxidising Agent Storage Cabinet

Dimensions			
	H	W	D
External	1065	500	450
Internal	818	418	370
Storage Levels	2		
Sump Capacity	23L		
Weight	41.0 kg		
Complies With	AS 4326:2008		
Max	4L	20L	205L
60L	12*	2	0

\*with 3 storage levels

Product Code

Specifications

SC100A



100L - Oxidising Agent Storage Cabinet

Dimensions			
	H	W	D
External	800	920	615
Internal	553	838	535
Storage Levels	2		
Sump Capacity	67L		
Weight	65.0 kg		
Complies With	AS 4326:2008		
Max	4L	20L	205L
100L	16	4	0

SC160A



160L - Oxidising Agent Storage Cabinet

Dimensions			
	H	W	D
External	1220	1100	450
Internal	973	1018	370
Storage Levels	2		
Sump Capacity	56L		
Weight	78.0 kg		
Complies With	AS 4326:2008		
Max	4L	20L	205L
160L	30*	6	0

\*with 3 storage levels

SC250A



250L - Oxidising Agent Storage Cabinet

Dimensions			
	H	W	D
External	1750	1100	500
Internal	1503	1018	420
Storage Levels	3		
Sump Capacity	64L		
Weight	123.0 kg		
Complies With	AS 4326:2008		
<b>Max</b>	<b>4L</b>	<b>20L</b>	<b>205L</b>
250L	50*	9	0

\*with 5 storage levels

SC300A



250L - Oxidising Agent Storage Cabinet

Dimensions			
	H	W	D
External	1880	806	804
Internal	1608	700	718
Storage Levels	3		
Sump Capacity	79L		
Weight	143.0 kg		
Complies With	AS 4326:2008		
<b>Max</b>	<b>4L</b>	<b>20L</b>	<b>205L</b>
250L	45*	12	1

\*with 5 storage levels